










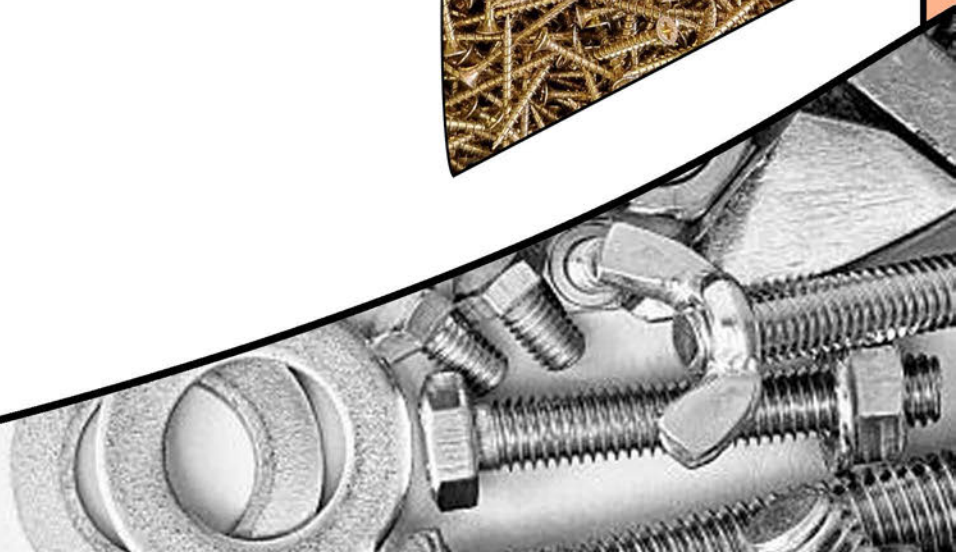

# WOOD PRODUCTS CATALOG

[ScheinertScrews.com](http://ScheinertScrews.com)  
[Info@ScheinertScrews.com](mailto:Info@ScheinertScrews.com)



# WOOD RELATED PRODUCTS

Screws Screws Screws Screws Screws Screws Screws Screws Screws Screws Screws Screws Screws							
							
Cabinet Installation Draw Front Adjustment	Deep Thread Type 17 With Nibs	Deep Thread	Euro	Framing	Hinge-Slide	Joint Connector	Low Profile Deep Thread

Screws Screws Screws Screws Screws Bolts Bolts Bolts Bolts Bolts Bolts Bolts Bolts Bolts Bolts							
							
Trim Head Square Fine Thread	Truss Combo Break-A-Way Machine Screw	Twinfast Wood Screw	Carriage	Draw Bolt	Hanger Bolt	Hex Lag	Hex Washer Lag

Nuts Nuts Nuts Nuts Nuts Nuts Nuts Nuts Nuts Nuts Washers Washers Washers Washers Washers							
							
Cross Dowel Barrel	Insert	Joint Connect Barrel Nut	Press	T-Nut	Countersunk Finishing	Flat (Regular)	Split Lock


Washers Washers Washers Washers Specialty Specialty Specialty Specialty Specialty Specialty Specialty							
							
Timber	Toothed External / Internal	Wood Anchor	Angle	Eye Screw All Styles	Folded Corner	Painted Fastener Perfect for Customizing Skateboards & E-Vehicles	Glide All Styles

Specialty Specialty Specialty Specialty Specialty Specialty Specialty Specialty					
					
Hex Keys	Insert Bits	Metal Stamping	Nails	Waxed Fasteners	Kit Bags Fully Customizable

# HEAD STYLES:



# RECESS TYPES:

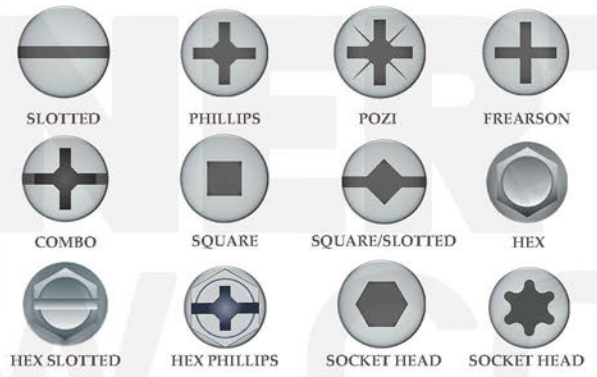

# POINT STYLES:

**TYPE A (ASA-A)** A thread forming screw for use in thin metal .015 to .050 thick. Used with drilled, punched or nested holes in sheet metal, resin impregnated plywood, asbestos combinations, among others.



**TYPE 17 (ASA-17)** A thread cutting screw for wood with a coarse tapping screw thread and a special long sharp point flute to capture chips.



**TYPE FZ (ASA-BF)** A thread cutting screw with a tapping screw thread with blunt tapered point and multi-cutting edges and chip cavities. For plastics, die castings, metal clad and resin impregnated plywoods.



**TYPE B (ASA-B)** A thread forming screw for use in heavier metal .050 to .200 thick. Larger root diameter with finer thread pitch for light and heavy sheet metal, non-ferrous castings, plastics, impregnated plywoods, asbestos combinations, and other materials.




**TYPE 1 (ASA-D)** A thread cutting screw with a single flute for general use. Produces a fine standard machine screw thread for field replacement.



**TYPE H (ASA-BG)** Thread cutting. Spaced threads, blunt point. Single slot has 2 cutting edges. Used for brittle or friable materials where threads too close together may cause material to crumble. Good in plastics and soft material.



**TYPE AB (ASA-AB)** A thread forming screw combining locating type point of Type A with thread size and pitch of Type B. Normal limitations of Type B apply.



**TYPE F (ASA-F)** A thread cutting screw with machine screw thread with blunt tapered point, having multi cutting edges and chip cavities. For heavy gauge sheet metal, aluminum, zinc, cast iron, brass and plastic.



**TYPE 25 (ASA-BT)** A thread cutting screw similar to Type 23 point except with coarse Type B thread. For plastics and other soft materials with large chip cleaning and cutting edges.



**TYPE BP (ASA-BP)** Thread forming screw. Same as Type B but has a cone point for use where holes are slightly misaligned. Spaced thread.




**TYPE G (ASA-G)** A thread cutting screw with a blunt die point, and a single through slot to form two cutting edges. Machine screw threads. For same general use as Type C but where less driving torque is required. For low-strength metals and plastics.



**TYPE U (ASA-U)** A thread forming screw with high Helix thread for driving or hammering into sheet metal, castings, fiber or plastics for permanent quick assemblies.



**TYPE C (ASA-C)** A thread forming screw with either coarse or fine pitch machine screw thread and blunt tapered point. Eliminates chips and permits replacement with standard screws in the field. Higher drive torque required. Usable in heavy sheet metal and die castings.



**TYPE 23 (ASA-T)** A thread cutting screw in the fine thread series offering maximum thread cutting area and excellent chip cleaning with minimum tightening torques.



# FINISHES:

Scheinert Screws can plate or paint any item to your specification. We stock a variety of finishes such as the examples below:

Antique Brass



Yellow Chromate



Zinc



Dye (Any Color)



Brass



Cadmium



Black Oxide



Nickel Brass



Statuary Bronze



Wax



Nickel



Copper



Black Chromate



Zinc Yellow



Green Iridite



Painting: Flat, Gloss Epoxy, Vinyl Primed, Head Painting, in any color to match any particular item.